


DOG FENCING INSTALLATION With Chain Link




THINGS YOU'LL NEED

- Chain link fence
- Wooden posts
- Tensioning wire
- Radisseur
- Pliers
- Hammer
- <u>Staples</u>
- Cable ties
- Pegs (additional)
- Spade (optional)
- Cement (optional)

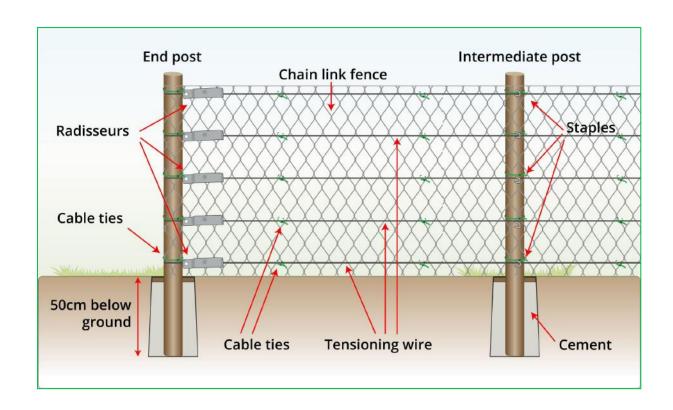

INSTRUCTIONS

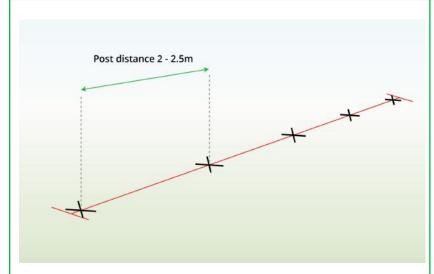

Step 1: Mark the Post Location


Specify the post locations while maintaining a spacing of 2-2.5m between each post.



Step 2: Dig Holes

Dig a hole for the posts, ensuring that the depth of the hole is approx. one-third of the post's length.


Use a spirit level to verify that the posts are perfectly upright.

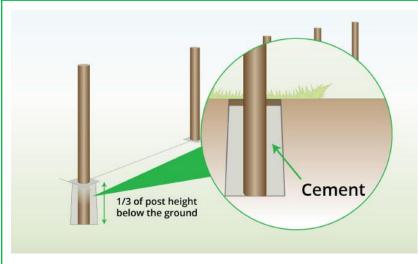

Step 3: Cement Posts In (Optional)


After filling the holes with concrete, position your posts within the concrete.



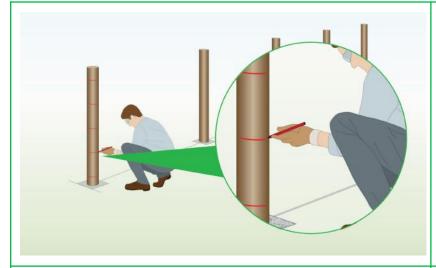

Step 4: Mark Wire Location


Start by marking the position for each wire strand on both the starting and ending posts.

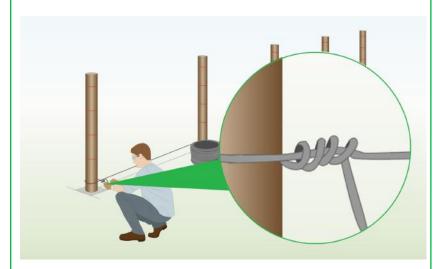

Step 5: Attach Wire to Start Post

Fasten the initial wire strand to the bottom part of the starting post.


Hook it around the post, twist it backward, and wind it around itself 4-5 times to secure the tension.

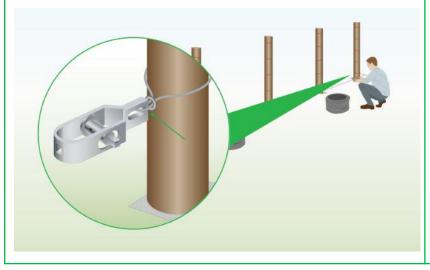

Step 6: Secure Radisseur to Last Post

Use a separate piece of wire to secure a radisseur to the last post.




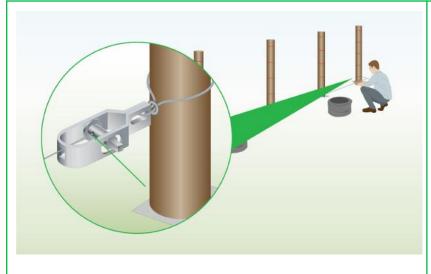

Step 7: Secure Wire to Radisseur


Cut the first tensioning wire, leaving an extra 10cm of length for adjustment.

Thread the wire through the hole positioned in the center of the radisseur.

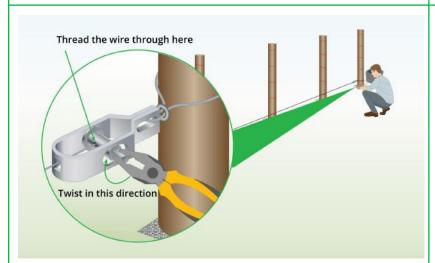

Step 8: Tension the Wire

Employ pliers to rotate the pin on the radisseur clockwise.

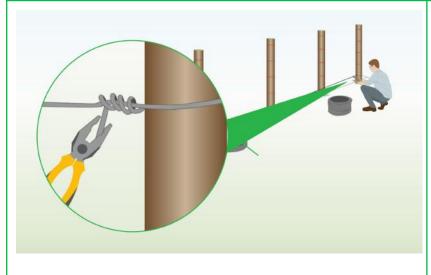


Alternative Option

In the absence of a radisseur, twist the wire around the post and wind it around itself 4-5 times as an alternative.




Using this method will result in less tension compared to utilizing a radisseur.

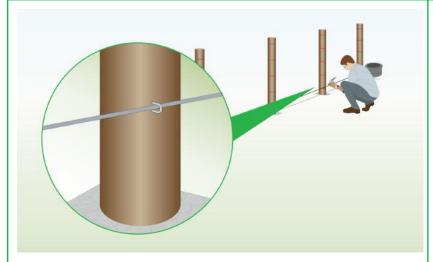

Step 9: Secure to Middle Posts

Fasten the wire to the middle posts using staples, leaving a slight gap to allow for some movement of the wire within the staple.

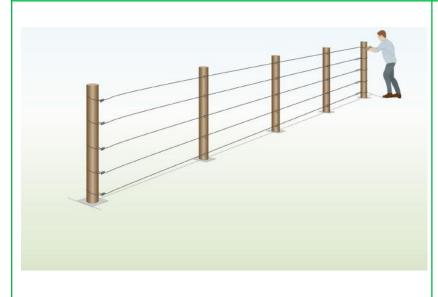


Step 10: Repeat Steps 5-9

Secure the remaining wire by repeating steps 5-9:

- 5 lines may be needed for lightweight fencing mesh
- 3 lines should be enough for sturdier fencing mesh




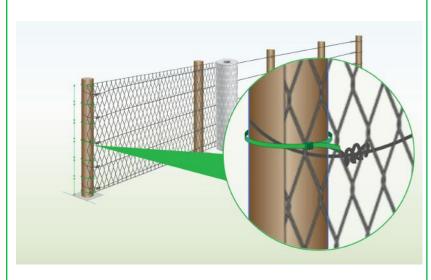

Step 11: Attach Mesh to End Post


Take sufficient mesh to cover the distance between the initial two posts.

Secure the mesh to the first post using staples or cable ties at 15cm intervals.

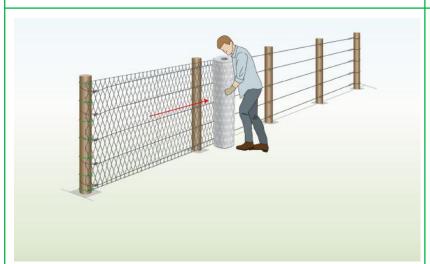

Step 12: Pull Tight


Pull the mesh tight to stretch it then attach it to the second post with staples or cable ties.

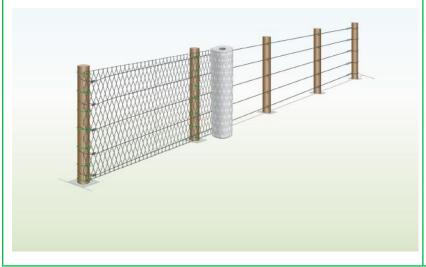

Step 13: Attach Mesh to Posts


Proceed with securing the remaining section of the mesh by following the process described in steps 11 and 12.



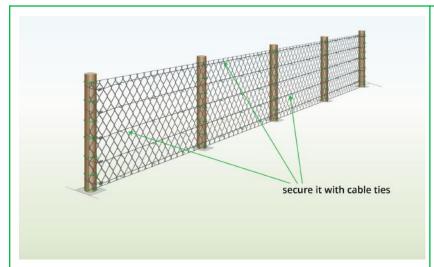

Step 14: Secure to Tension Wire

Make sure to secure the tensioning wire to the fence at various points to maintain the tension of the fence.

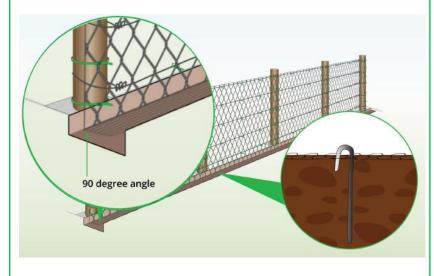

Additional Step to Prevent Digging:

Dig a trench along your fence line, then fold the bottom of the mesh at a 90-degree angle to form a 15cm lip. This extension will cover the trench's bottom.

Use pegs to secure the extension to the ground at every 60cm, then cover it by adding a layer of soil or mulch over it.