HOW TO INSTALL A Wire Mesh Fence What You'll Need:

Staples or cable ties

- T posts or
- wooden posts Post driver

Welded mesh

- (for T posts)
- Protective gloves

- **T POSTS: Mark Location**
- Hammer

Plier


Spade (optional)

Wire cutter


Spirit level


Tape measure

- Cement (optional)

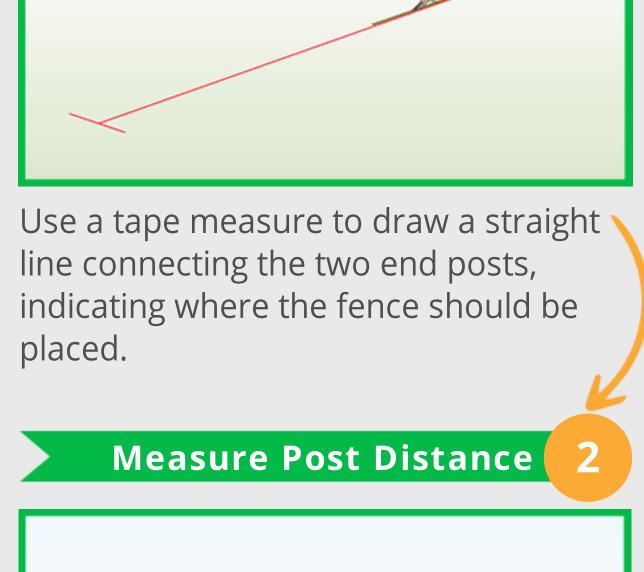

Post distance: 2-3m

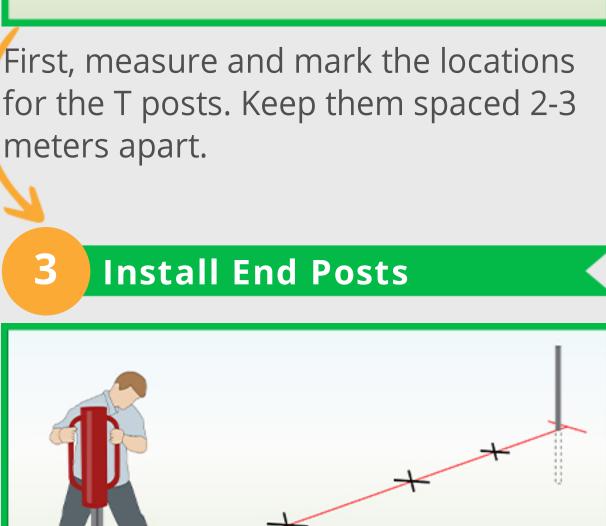


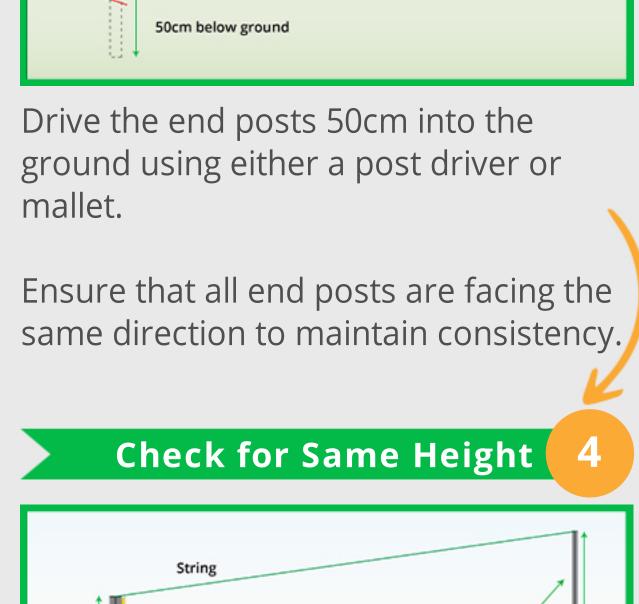

posts, then use a tape measure to verify the height of the installed posts. **Check for Straightness**

Secure a string between the two end

Should have the same height

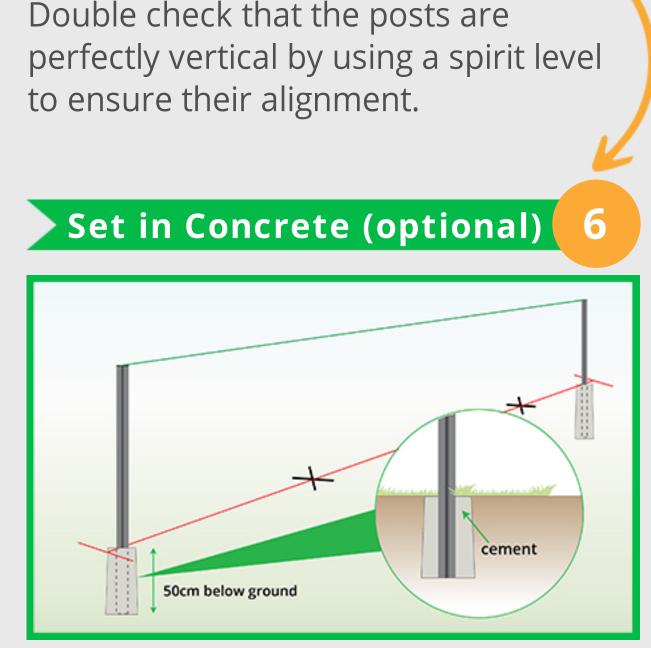

To ensure a sturdy and long-lasting

the posts in concrete.

fence, improve its stability by securing

This process requires digging a 50cm

base for the posts to stand on.

hole and using cement to create a solid

To install the middle posts, follow steps

Make sure that the posts are all facing

For a more durable fence, use concrete

Attach Mesh to End Post

in the same direction and are being

placed in a straight and uniform

to secure the middle posts.

3 through 5.

manner.

post.

50cm below ground

Install Middle Posts


Start at the end post and fasten the mesh securely to it by using cable ties.

These ties can be inserted through the

You can always add multiple cable ties

around the entire post.

holes that have been pre-drilled into the

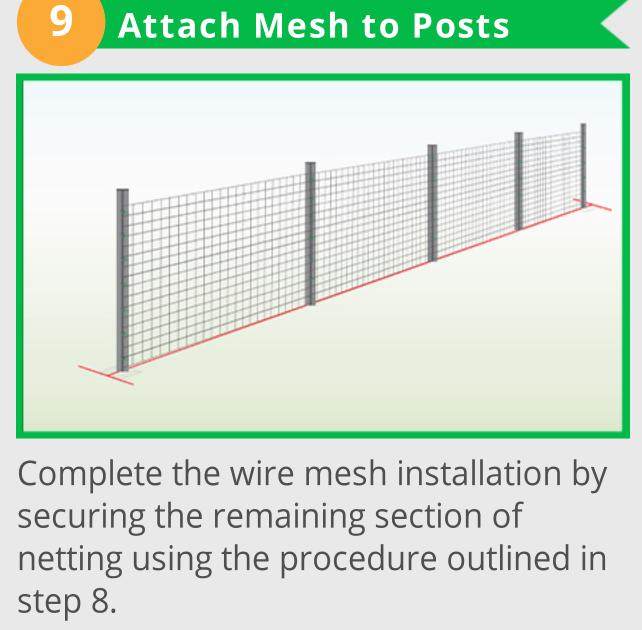

WOODEN: Mark Location

Determine the placement of the posts,

ensuring a distance of 2-2.5m between

Post distance 2 - 2.5m

Dig Holes

below the ground

making sure that its depth is

straight and vertical.

Start by digging a hole for the posts,

Double-check with a spirit level to

confirm that the posts are completely

Cement Posts In (optional)

approximately one-third of the length of

each post.

the post.

Cement 1/3 of post height below the ground

Once the concrete has been poured

in the center of the concrete.

into the holes, carefully place your posts

Attach Mesh to End Post

Take enough mesh to cover the space between the first two posts. Attach the mesh securely to the posts by using staples or cable ties every 15cm. **Continue Attaching**

Continue to properly fasten the

unsecured part of the mesh by

step 4.

following the instructions outlined in

Attach Mesh to Last Post

Secure the mesh to the final post to

complete the wire mesh fence

installation.